

ProStack™ CRIBBING

Interlocking Height.

ProStack™ Cribbing has been developed with an interlocking design that safely provides additional height under outrigger floats when setting up in uneven ground conditions.



MADE IN
THE U.S.A.



4 SIMPLE STEPS To Make Your Setup Safe




STEP 1

The base ProStack Outrigger Pad is positioned first. It's pyramid-shaped surface faces upward to receive the interlocking pyramids on the cribbing blocks.



STEP 2

The first layer of (2) ProStack cribbing blocks is added, with their pyramid shape surface, they fit tightly into the base pad and each other.

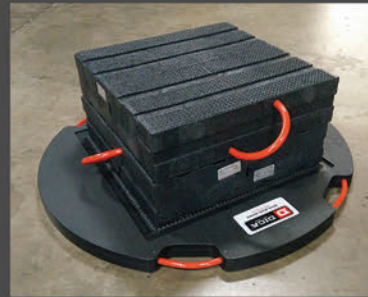

STEP 3

The second layer of (2) ProStack cribbing blocks is added, which also fit tightly into the initial layer of blocks and each other.



STEP 4

Lastly, a ProStack Grip Pad is placed on top of the stack to protect the pyramid surface on the blocks and provide a high friction surface for the outrigger foot.

MODEL	WEIGHT	DESCRIPTION
ProStack CRIBBING KITS (Maximum Rated Capacity: 110,000 lbs)		
PSC-36-4-1	305 LBS	36" ProStack Pad (1), 6" x 12" x 24" Cribbing Blocks (4), .75" Grip Pad (1)
PSC-42-4-1	327 LBS	42" ProStack Pad (1), 6" x 12" x 24" Cribbing Blocks (4), .75" Grip Pad (1)
PSC-48-4-1	357 LBS	48" ProStack Pad (1), 6" x 12" x 24" Cribbing Blocks (4), .75" Grip Pad (1)
ProStack INDIVIDUAL PARTS		
PSC-DR36-2	68 LBS	36" x 2" ProStack Pad with Interlocking Pyramids
PSC-DR42-2	90 LBS	42" x 2" ProStack Pad with Interlocking Pyramids
PSC-DR48-2	120 LBS	48" x 2" ProStack Pad with Interlocking Pyramids
TCR-612-24	55 LBS	6" x 12" x 24" Cribbing Block
TCR-612-12	27 LBS	6" x 12" x 12" Cribbing Block
NP2424-.75	16 LBS	24" x 24" x .75" Grip Pad
TCR-2/4-12	1.5 LBS	2" x 4" x 12" Cribbing Wedge
TCR-4/4-20	4 LBS	4" x 4" x 20" Cribbing Wedge
TCR6/7-24	13 LBS	6" x 7" x 24" Cribbing Wedge

BM-0056



800.610.3422 • dicausa.com • sales@dicausa.com