



“Your outrigger pads have been a solid investment safety wise by allowing our personnel to handle outrigger pads with minimal physical strain.”

Rick L. Barr

TRI-STATE GENERATION & TRANSMISSION


PRODUCT DETAILS

- Engineered Thermoplastic Material
- TuffGrip® Handles
- Waterproof and Chemical Resistant
- Industrial Grade Safety Texturing
- Radius Edges and Corners
- Non-Conductive
- Lifting Points for Rigging
- Guaranteed Unbreakable


BEST FOR

- Mobile Cranes
- Concrete Pumpers
- Aerial Lifts
- Rock Crushers

PRODUCT	W x L x H (in)	THICKNESS (in)	APPROX AREA (sq ft)	WEIGHT (lbs)	CRUSH RATING* (psi)	WORKING LOAD LIMIT* (lbs)
3" Pads (Available in Black)						
A D1818-3	18 x 18 x 3	3 inch	2	32	600	95,000
B D2424-3	24 x 24 x 3	3 inch	4	60	600	112,000
C DR36-3 (Round)	36 x 3	3 inch	7	102	600	130,000
D DR42-3 (Round)	42 x 3	3 inch	9.5	138	600	150,000
E DR48-3 (Round)	48 x 3	3 inch	12.5	180	600	170,000
F DR60-3 (Round)	60 x 3	3 inch	19.5	285	600	210,000
4" Pads (Available in Black)						
G DR48-4 (Round)	48 x 4	4 inch	12.5	245	750	200,000
H DR60-4 (Round)	60 x 4	4 inch	19.5	380	750	240,000

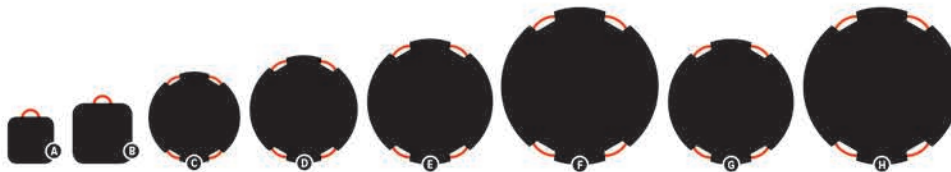

Crush Rating – The maximum allowable pressure. **Working Load Limit** – The maximum allowable load based on the application.

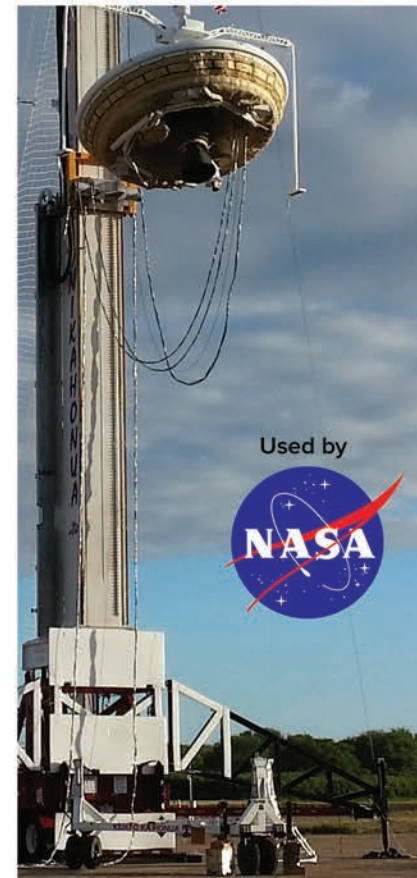

Used by

